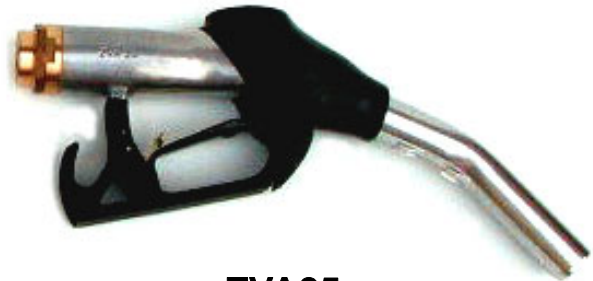


# AUTOMATIC REFUELLING NOZZLES

**ZVA SLIMLINE****ZVA25**

## ZVA Slimline. Specification

**Type** :Automatic 3/4" refuelling trigger nozzle.

**Operation** : Automatic venturi type high level cut off (patented), fitted with latched lever, and internal check valve.

**Flow Rate** :Up to 50 Litres/Minute.

**Working Pressure** : 0.5 to 4 Bar.

**Materials Of Construction** : Aluminium body and guard, Stainless Steel inlet swivel, Stainless Steel, Brass and Acetal internals, Nitrile/Vulkollan seals, oil resistant PVC scuff guard.

**Inlet Connection** :Swivel type, threaded 1" BSPP female.

**Nett Weight** :Approx. 1.1 Kg with spout fitted.

**Accessories** :(to be ordered separately).

Bonding cable and clip, 1.2m or 2.0 metres long.  
Inlet sight glass and Stainless Steel 100 mesh strainer.

**Approvals** : Meets the safety and Weights and Measures requirements of all European and most international markets, as well as TRbF 513, German approval 08/PTB Nr. III B/S 1080.

## ZVA25. Specification

**Type** : Automatic 1" refuelling trigger nozzle.

**Operation** :Automatic venturi type high level cut off (patented), fitted with latched lever, and internal check valve.

**Flow Rate** : Up to 140 Litres/Minute.

**Working Pressure** : 0.5 to 3.5 Bar.

**Materials Of Construction** : Aluminium body and guard, Brass inlet swivel, Stainless Steel, Brass and Acetal internals, Nitrile/Vulkollan seals, oil resistant PVC scuff guard.

**Inlet Connection** : Swivel type, threaded 1" BSPP female.

**Nett Weight** : Approx. 1.5 Kg with spout fitted.


**Accessories** :(to be ordered separately).

Bonding cable and clip, 1.2m or 2.0 metres long.  
Inlet sight glass and Stainless Steel 100 mesh strainer.

Dust cap and spring loaded keep chain.

**Approvals**: Meets the safety and Weights and Measures requirements of all European and most international markets, as well as TRbF 513, German approval 08/PTB Nr. III B/S 1080.

## ZVA - Slimline

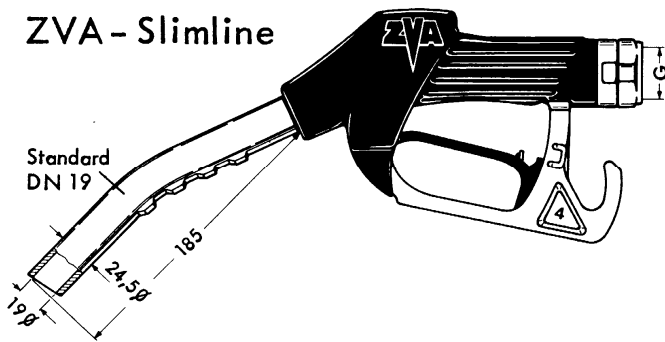

## ZVA Slimline How To Order

Quote **part number :160ZVASTD** for the basic nozzle, accessories must be ordered separately from the following list.  
 EKG plastic coated Stainless Steel bonding wire and Brass clip/plug.  
 1.2m long, **160EKG1200**.  
 2.0m long, **160EKG2000**.  
 SG1" Inlet Sight Glass, threaded 1" BSPP male by 1" BSPP female, **160000SG1**.  
 ES239.1 100 mesh Stainless Steel strainer, for use with inlet sight glass, **160ES239.1**.

## ZVA25

### How To Order

Quote **part number :1600ZVA25.41** for the basic nozzle with spout, accessories must be ordered separately from the following list.

GKG Dust Cap with spring loaded keep chain, **16000GKG25**.


EKG plastic coated Stainless Steel bonding wire and Brass clip/plug.

1.2m long, **160EKG1200**.

2.0m long, **160EKG2000**.


SG1" Inlet Sight Glass, threaded 1" BSPP male by 1" BSPP female, **160000SG1**.

ES239.1 100 mesh Stainless Steel strainer, for use with inlet sight glass, **160ES239.1**.

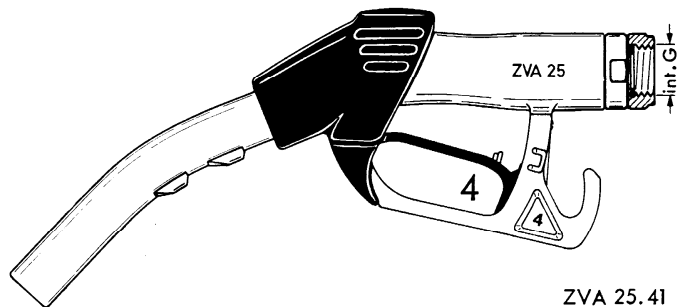

ZVA 25.41

## ZVA Slimline/ZVA25 Pressure Loss

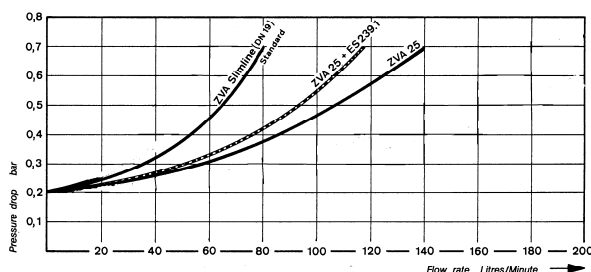

## ZVA Slimline/ZVA25 Accessories

