

AUTOMATIC REFUELLING NOZZLES

**ZVA SLIMLINE****ZVA25**

ZVA Slimline. Specification

Type :Automatic 3/4" refuelling trigger nozzle.

Operation : Automatic venturi type high level cut off (patented), fitted with latched lever, and internal check valve.

Flow Rate :Up to 50 Litres/Minute.

Working Pressure : 0.5 to 4 Bar.

Materials Of Construction : Aluminium body and guard, Stainless Steel inlet swivel, Stainless Steel, Brass and Acetal internals, Nitrile/Vulkollan seals, oil resistant PVC scuff guard.

Inlet Connection :Swivel type, threaded 1" BSPP female.

Nett Weight :Approx. 1.1 Kg with spout fitted.

Accessories :(to be ordered separately).

Bonding cable and clip, 1.2m or 2.0 metres long.
Inlet sight glass and Stainless Steel 100 mesh strainer.

Approvals : Meets the safety and Weights and Measures requirements of all European and most international markets, as well as TRbF 513, German approval 08/PTB Nr. III B/S 1080.

ZVA25. Specification

Type : Automatic 1" refuelling trigger nozzle.

Operation :Automatic venturi type high level cut off (patented), fitted with latched lever, and internal check valve.

Flow Rate : Up to 140 Litres/Minute.

Working Pressure : 0.5 to 3.5 Bar.

Materials Of Construction : Aluminium body and guard, Brass inlet swivel, Stainless Steel, Brass and Acetal internals, Nitrile/Vulkollan seals, oil resistant PVC scuff guard.

Inlet Connection : Swivel type, threaded 1" BSPP female.

Nett Weight : Approx. 1.5 Kg with spout fitted.


Accessories :(to be ordered separately).

Bonding cable and clip, 1.2m or 2.0 metres long.
Inlet sight glass and Stainless Steel 100 mesh strainer.

Dust cap and spring loaded keep chain.

Approvals: Meets the safety and Weights and Measures requirements of all European and most international markets, as well as TRbF 513, German approval 08/PTB Nr. III B/S 1080.

ZVA - Slimline

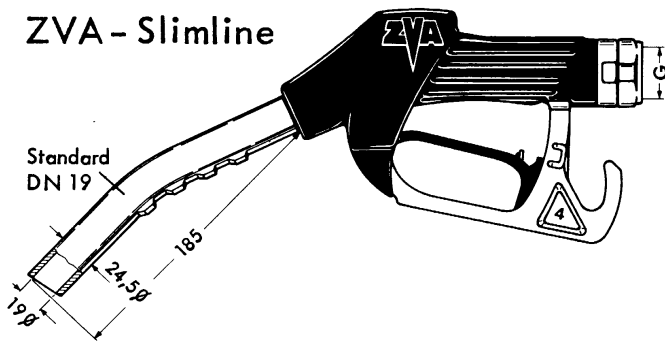

ZVA Slimline How To Order

Quote **part number :160ZVASTD** for the basic nozzle, accessories must be ordered separately from the following list.
 EKG plastic coated Stainless Steel bonding wire and Brass clip/plug.
 1.2m long, **160EKG1200**.
 2.0m long, **160EKG2000**.
 SG1" Inlet Sight Glass, threaded 1" BSPP male by 1" BSPP female, **160000SG1**.
 ES239.1 100 mesh Stainless Steel strainer, for use with inlet sight glass, **160ES239.1**.

ZVA25

How To Order

Quote **part number :1600ZVA25.41** for the basic nozzle with spout, accessories must be ordered separately from the following list.

GKG Dust Cap with spring loaded keep chain, **16000GKG25**.


EKG plastic coated Stainless Steel bonding wire and Brass clip/plug.

1.2m long, **160EKG1200**.


2.0m long, **160EKG2000**.

SG1" Inlet Sight Glass, threaded 1" BSPP male by 1" BSPP female, **160000SG1**.

ES239.1 100 mesh Stainless Steel strainer, for use with inlet sight glass, **160ES239.1**.

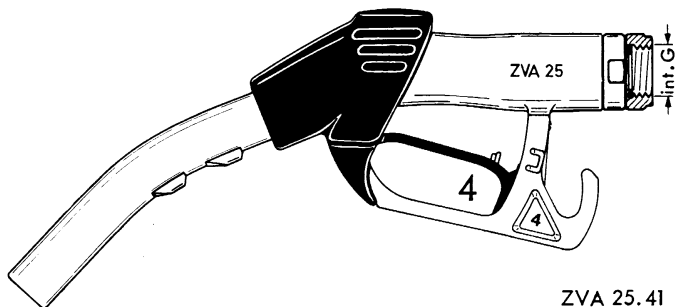

ZVA Slimline/ZVA25 Pressure Loss

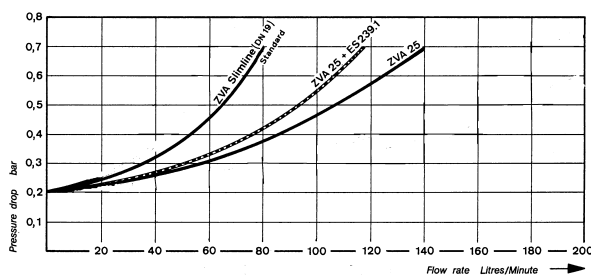

ZVA Slimline/ZVA25 Accessories

